


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>110436</b>
	Approved <i>MCT</i>	Date 02/05/09
	Distribution : USER	Rev. 2 (06/25/13) Uncontrolled Document

**TNC Panel Jack**  
for S29156, S28150

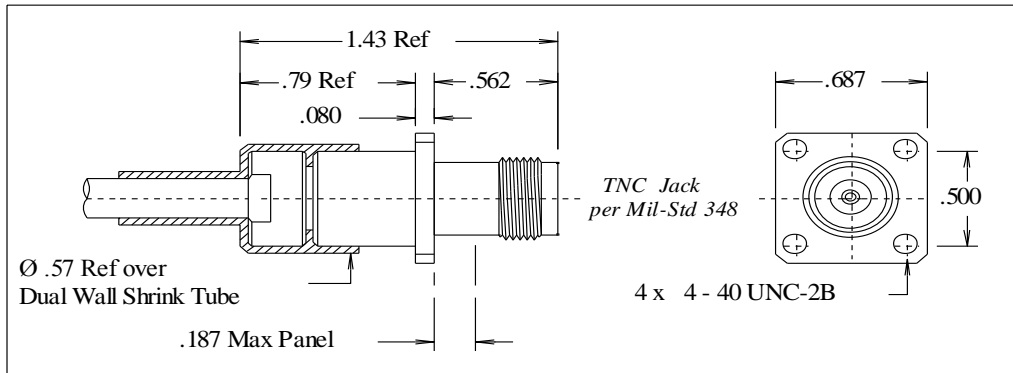

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	DC - 15 GHz
Temperature Rating	- 65° to + 200° C
Voltage Rating	500 VRMS

**CONNECTOR WEIGHT (Each)**

tbd

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.

**Crimp Tooling:**

Solder-on Termination

**CONSTRUCTION**

**Materials:**

Body	Stainless Steel
Insulator	PTFE
Center Contact	Beryllium Copper

**Finish :**

Body	Passivated
Center Contact	Gold

**Applicable Standards**

MIL-STD 348A  
MIL-C-39012

**Notes :**

- 1) A 3.0" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-110436 Termination Instruction sheet for strip dimensions & instructions.

