


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	110523
	Approved <i>M.C.J.</i>	Date 01/08/2009
	Distribution : USER	Rev. 1 (06/25/13) Uncontrolled Document

ETNC Bulkhead Jack with safety wire holes
for S29113

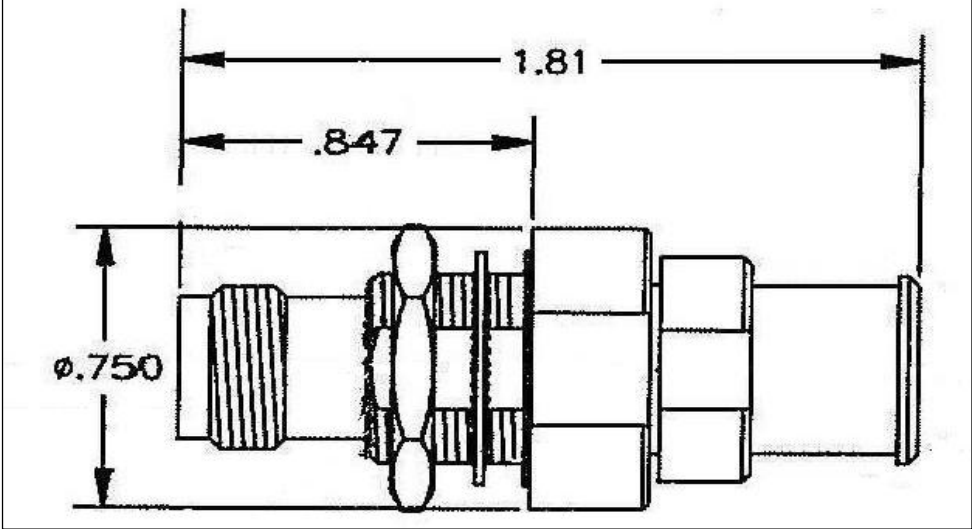

PERFORMANCE

Nominal Impedance 50 Ohms
Frequency Range DC - 18 GHz
Temperature Rating - 65° to + 200° C

CONNECTOR WEIGHT (Each)

tbd

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Crimp Tooling:

Solder-on Termination

CONSTRUCTION

Materials:

Body	Stainless Steel
Coupling Nut	Stainless Steel
Center Contact	Beryllium Copper
Insulator	PTFE
Gasket	Silicon Rubber

Finish :

Center Contact	Gold
----------------	------

Applicable Standards

MIL-C-87104/2
MIL-STD 348A
MIL-C-39012

Notes :

1) Please refer to T-110523 Termination Instruction sheet for strip dimensions & instructions.