

A Division of the Angelus Corporation

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

PO Box 330 Sussex, WI 53089

Approved : 


Date : 01/31/14

Rev. 0

Distribution : User

Uncontrolled Document

TNCA Bulkhead Jack
for S29156, S28150, & HT77210F Cables

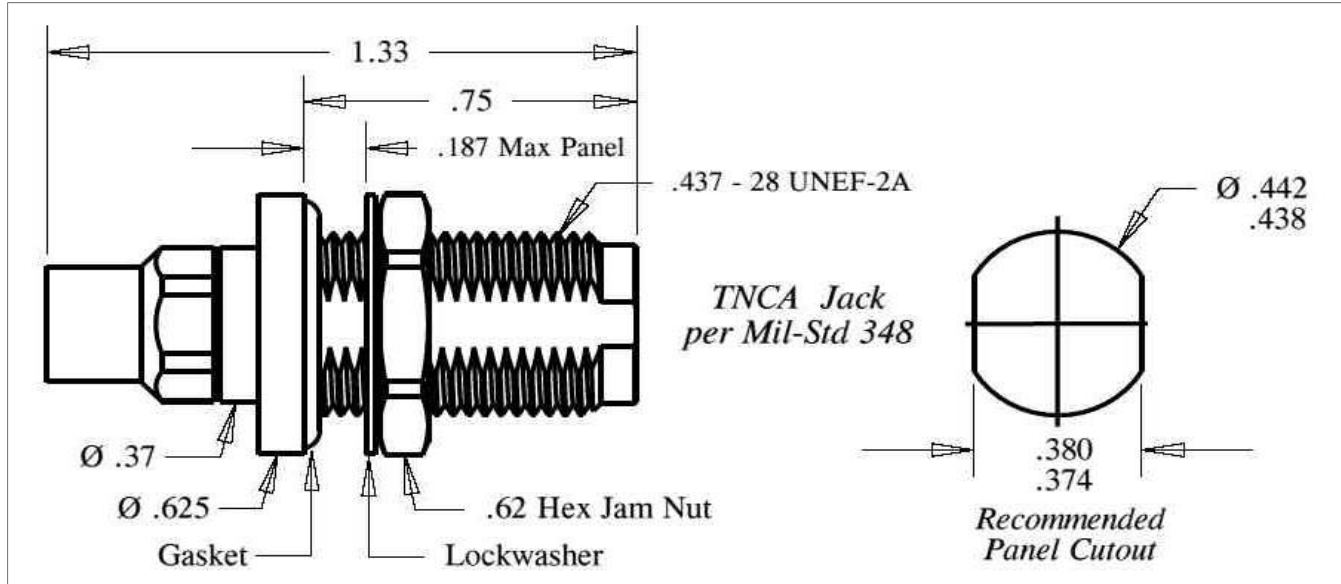

PERFORMANCE

Nominal Impedance	50 Ohms
Frequency Range	0 - 18 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

CONNECTOR WEIGHT (Each)

.65 ounces (25.80 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

CONSTRUCTION

Materials:

Body	Stainless Steel
Clamp Nut	Stainless Steel
Center Contact	Beryllium Copper
Solder Ferrule	Brass
Dielectric	PTFE
O-Ring	Silicon Rubber
Lock Nut	Stainless Steel

Finish :

Body, Clamp Nut	Passivated
Solder Ferrule	Gold
Center Contact	Gold

<i>Applicable Standards</i>	MIL-STD 348A MIL-C-39012
-----------------------------	-----------------------------

Notes :

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-12/3-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-120521 Termination Instruction sheet for strip dimensions & instructions.