


A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved : *PFT*
 Distribution : USER

Date : 10/10/18
 Rev : 1 (08/10/20)
 Uncontrolled if Printed

M39029 Size 8 Coaxial Socket Contact
 for UH67163

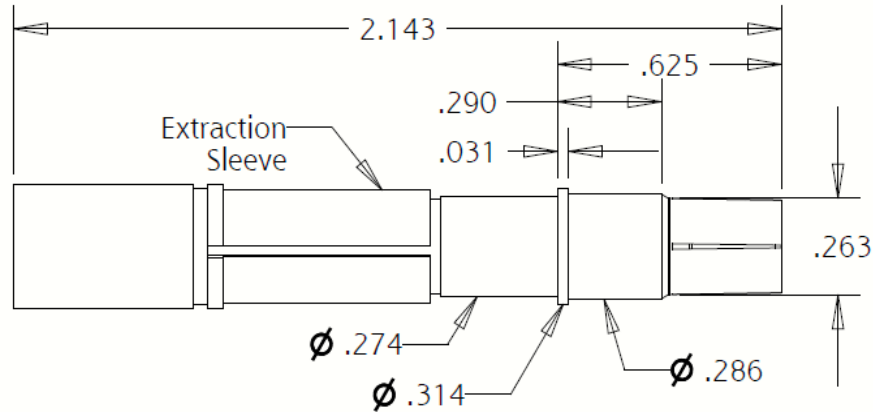

* 0.290" Hex Crimp across flats after crimping (0.335" Max across hex points)

Note: Verify length of M38999 Type Connector & Backshell to ensure fit

PERFORMANCE

Nominal Impedance :	50 Ohms
Frequency Range :	0 - 5 GHz
Voltage Rating :	750 V(rms)
Insulation Resistance :	5000 Megohms min.
Dielectric Withstanding Voltage :	1300 V(rms)
VSWR (max) :	1.3:1
Insertion Loss (max) :	0.3 dB

CONNECTOR WEIGHT (Each)

0.49 oz (13.74 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION (Tooling)

Center Contact
 Solder Only

Crimp Ferrule
 M22520 / 5-01 Tool
 M22520 / 5-41 Die Set
 (.290" A hex)*

CONSTRUCTION

Materials:

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Extraction Sleeve	Nylon, Type 6/6

Finish :

Body, Ferrule	Gold
Center Contact	Gold

CONSTRUCTION

SAE AS39029/59
 MIL-C-38999 Series I, III, IV

Notes :

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-12/3-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1505XX Termination Instruction sheet for strip dimensions & instructions.